



## Epoxy Quick Set™

**Description:** Loctite Epoxy Quick Set is a two-part adhesive consisting of an epoxy resin and a hardener. When mixed in equal volumes, the resin and hardener react to produce a tough, rigid, high strength bond in 5 minutes for most projects. Available in a convenient dual syringe which delivers equal parts of both components every time. Loctite Epoxy Quick Set can be used as an adhesive for a wide range of materials or as a versatile filler for gap filling, surface repairs and laminating. Loctite Epoxy Quick Set does not shrink and is resistant to water and most common solvents. It can be tinted with earth pigments, cement or sand for color matching. It can be sanded and drilled.

**Available As:**

Item #	Size	Package
1395391	0.85 fl oz (25 ml)	Carded Syringe

**Features & Benefits:**

- 5 Minute Set Time
- Dries Translucent Yellow
- Machinable
- Water Resistant
- Will Not Shrink or Expand

**Recommended For:**

Loctite Epoxy Quick Set can be used for bonding metal, glass, ceramic, wood, many rigid plastics, china, tile, fiberglass, concrete and stone. Can be combined with fiberglass cloth for a durable patch.

**Limitations:**

- Not recommended for polyethylene, polypropylene, non-stick coatings, nylon products or flexible materials
- Not suitable for applications requiring short-term heat exposure greater than 302°F (150°C)
- Not recommended for application with prolonged water immersion or continuously wet areas
- Not for use on potable water systems

## Typical Uncured Physical Properties:

Color:	Hardener:	Light yellow	
	Resin:	Colorless	
Base:	Epoxy resin / Polymercaptan hardener		
Odor:	Mild amine		
Specific Gravity:	Hardener:	1.04	
	Resin:	1.17	
Flash Point:	Hardener:	>200°F (93°C)	
	Resin:	> 480°F (249°C)	
VOC Content (Resin & Hardener):	0.11% by weight		CARB
Shelf Life:	24 months from date of manufacture (unopened)		
Lot Code Explanation:	For Example:		
Stamped on back of syringe label	<b>LB6FAC569</b>		
	6 = Last Digit in the Year of Manufacture 6 = 2016 (i.e. 5 = 2015, 6 = 2016, etc.)		<b>A</b> – January
	F = Month produced (see chart at right) F = June		<b>B</b> – February
	June 2016 is the date of manufacture		<b>C</b> – March
			<b>D</b> – April
			<b>E</b> – May
			<b>F</b> – June
			<b>G</b> – July
			<b>H</b> – August
			<b>J</b> – September
			<b>K</b> – October
			<b>L</b> – November
			<b>M</b> – December

## Typical Application Properties:

Application Temperature:	Apply between 39°F (4°C) and 95°F (35°C)	
Gel Time (5g : 5g):	4 to 10 minutes*	
Usable Strength:	1 hour*	
Full Cure Time:	24 hours*	
	*Time is dependent on temperature, humidity and thickness of epoxy applied	

## Typical Cured Performance Properties:

Color:	Clear amber	
Cured Form:	Non-flammable solid	
Service Temperature:	-10°F (-23°C) to 120°F (49°C) -10°F (-23°C) to 302°F (150°C)	Long Term (Continuous) Exposure Short Term (Intermittent) Exposure
Water Resistant:	Yes	
Sandable:	Yes	
Paintable:	No but can be tinted using earth pigments, cement or sand	
Hardness:	80 ± 1	Shore D
Tensile Shear Strength:		
Cold Rolled Steel, Sandblasted:		
1 hour cure:	1322 ± 128 psi (9.11 ± 0.88 N/mm <sup>2</sup> )	
4 hour cure:	2494 ± 78 psi (17.20 ± 0.54 N/mm <sup>2</sup> )	
24 hour cure:	3437 ± 58 psi (23.70 ± 0.40 N/mm <sup>2</sup> )	
7 day cure:	3426 ± 155 psi (23.62 ± 1.07 N/mm <sup>2</sup> )	
Aluminum, Sandblasted:		
24 hour cure:	2055 ± 290 psi (14.17 ± 2.0 N/mm <sup>2</sup> )	
7 day cure, 7 day water immersion:	2048 ± 160 psi (14.12 ± 1.10 N/mm <sup>2</sup> )	
Compressive Shear Strength:	24 hour cure	
Sanded Hard PVC (White):	1081 ± 199 psi (7.45 ± 1.37 N/mm <sup>2</sup> )	
Sanded Acrylite FF:	958 ± 268 psi (6.61 ± 1.85 N/mm <sup>2</sup> )	
Maple:	2088 ± 243 psi (14.40 ± 1.68 N/mm <sup>2</sup> )	
Solvent Resistance:	Tensile Shear Strength	
24 hour gasoline immersion:	3216 ± 275 psi (22.17 ± 1.90 N/mm <sup>2</sup> )	Aluminum, 7 day cure

Side Impact Resistance:

6.8 Joules

Sandblasted Cold Rolled Steel  
1" x 1", 7 day cure

## Directions:

### Tools Typically Required:


Utility knife, mixing tool/applicator (e.g. small flat plastic or wooden stick), disposable surface (e.g. foil).

### Safety Precautions:

Apply and cure in a well-ventilated area. Wear gloves and wash hands after use.

### Preparation:

Surfaces must be clean, dry and free from oil, wax, paint, rust, etc. Roughen smooth surfaces for better adhesion by sandblasting or sanding with an emery cloth. Wash glass and ceramic surfaces with soap and water then rinse and let dry. Pre-fit parts to be joined. Remove the plug from between the piston. Cut off the end tips of the syringe at one of the three cut-off points as illustrated below. For easier extrusion, cut at the 4 mm or 5mm opening. For more precise application, cut at 3 mm opening.

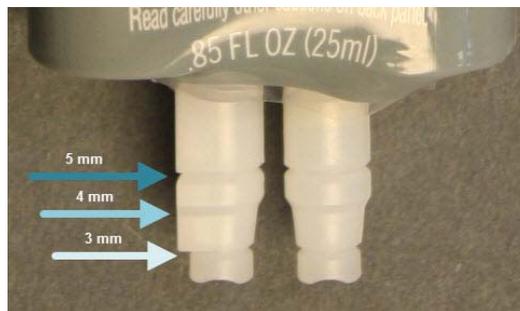

Turn syringe end up and pull plunger back slightly allowing air bubbles to rise to top. Press the plunger to expel air. Depress the double piston to dispense equal parts of the two materials on a disposable surface. Mix resin and hardener thoroughly (about 1 minute). Wipe syringe tips clean, retract piston slightly and close with the plug. Ensure that the plug is always placed in the same orientation on the tips.

### Application:

For best results apply a small amount of mixed adhesive to both surfaces within one to two minutes of mixing and press together. Placing parts together close to the 5 minute set time will reduce adhesion. Remove any excess glue immediately. Support bond for 10 minutes at room temperature. Usable strength achieved in 1 hour. Fully cured in 24 hours.

### Clean-up:

Clean excess glue immediately with acetone before adhesive sets. Cured adhesive may be cut away with caution using a sharp blade. Prolonged immersion in paint stripper will soften the cured adhesive to aid removal. Note: Acetone is highly flammable and not compatible with all surfaces. Follow manufacturer's instructions and test on small area before applying.

## Storage & Disposal:

Not damaged by freezing. If frozen, warm to room temperature until the resin and hardener become liquid enough to mix. Use an approved hazardous waste facility for disposal.

## Label Precautions:

**DANGER:** Corrosive. Causes eye and skin burns. May cause allergic skin and respiratory reaction. May be harmful if absorbed through skin.

**DANGER:** Resin contains epoxy resin. Hardener contains polymercaptan and amine curing agents. Do not get in eyes or on skin. Do not breathe vapors. **FIRST AID:** For eye contact, flush with water for 15 minutes, call a physician. For skin contact, wash thoroughly with soap and water, call a physician if symptoms persist. If swallowed, **DO NOT** induce vomiting, call a physician. **KEEP OUT OF REACH OF CHILDREN.**

Refer to the Safety Data Sheet (SDS) for further information.

## Disclaimer:

The information and recommendations contained herein are based on our research and are believed to be accurate, but no warranty, express or implied, is made or should be inferred. Purchasers should test the products to determine acceptable quality and suitability for their own intended use. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.



# TECHNICAL DATA SHEET



**Trusted Performance. Proven Results.**

For over 50 years, Loctite Brand adhesives and sealants have taken on the toughest jobs. Used in race cars, airplanes, and even in the space-shuttle, Loctite provides solutions for the most demanding industrial, professional and consumer applications. Loctite gives you not the specialization, power and performance to not only get your job done, but to get it done right.

1-800-624-7767 – Mon-Fri - 9:00a – 4:00p ET

[www.loctiteproducts.com](http://www.loctiteproducts.com)



Loctite Brand is part of the Henkel family of brands. Founded in 1876, Henkel is a global leader in the consumer and industrial businesses. Henkel operates worldwide with leading brands and technologies in three business areas: Laundry & Home Care, Beauty Care and Adhesive Technologies.

Henkel Corporation - Professional & Consumer Adhesives Headquarters - Rocky Hill, CT 06067

[www.henkelna.com](http://www.henkelna.com)

Revision Date: 08/30/2016 Supercedes: 02/27/2014 Ref. #: 193046 / 193468 Bulk. #: 1295955 / 252111

