



JosS d.o.o.

Sokolska 45 | 2000 Maribor | Slovenia

T +386 2 421 57 20 | GSM +386 41 705 509

joss@joss.si | www.joss.si

Technical Data Sheet

Previous Name: **Shell Vitrea M**

Shell Morlina S1 B 460

Industrial Bearing & Circulating Oils

Shell Morlina S1 B oils are high performance oils designed to provide excellent protection for most industrial bearing and circulating oil system applications, particularly those processes where water shedding (demulsification) is important for the life of the equipment. Meets the most basic requirements of the Morgan standard for common bearing oils.

- *Reliable Protection*
- *Industrial Application*
- *Water Shedding*

DESIGNED TO MEET CHALLENGES

Performance, Features & Benefits

▪ Good oil life – Maintenance saving

Shell Morlina S1 B oils use carefully chosen components to help provide consistent performance and protection throughout the maintenance interval.

▪ Reliable wear & corrosion protection

Shell Morlina S1 B oils help prolong the life of bearings and circulating systems through:

- Good water separation characteristics that help ensure that critical oil films are retained between highly loaded parts.
- Good air release characteristics to minimize cavitation and associated damage to circulating pumps.
- Helps protect against corrosion, even in the presence of water.

▪ Maintaining system efficiency

Shell Morlina S1 B oils are blended with high quality, solvent refined base oils that promote good water separation and air release to ensure the efficient lubrication of the machines and systems.

▪ Oil lubricated bearings

Suitable for most plain and rolling element bearings in general industrial applications.

▪ Roll-neck bearings

▪ Enclosed industrial gear systems

Low or moderately loaded enclosed gears where EP performance is not required.

Specifications, Approvals & Recommendations

- Morgan MORGOL® Lubricant Specification (New Oil Rev. 1.1) (MORGOL is a registered trademark of the Morgan Construction Company)

- DIN 51517-1 – Oil Type C

For a full listing of equipment approvals and recommendations, please consult your local Shell Technical Helpdesk.

Compatibility & Miscibility

▪ Paint Compatibility

Shell Morlina S1 B oils are compatible with seal materials and paints normally specified for use with mineral oils.

Main Applications



- Machine circulation systems

Typical Physical Characteristics

Properties			Method	Morlina S1 B 460
ISO Viscosity Grade			ISO 3448	460
Kinematic Viscosity	@40°C	mm ² /s	ASTM D445	460
Kinematic Viscosity	@100°C	mm ² /s	ASTM D445	31
Density	@15°C	kg/m ³	ISO 12185	896
Viscosity Index			ISO 2909	95

Properties		Method	Morlina S1 B 460
Flash Point (COC)	°C	ISO 2592	260
Pour Point	°C	ISO 3016	-6
Rust, Distilled Water		ASTM D665A	Pass
Emulsion Test, Minutes	@82°C	ASTM D1401	30

These characteristics are typical of current production. Whilst future production will conform to Shell's specification, variations in these characteristics may occur.

Health, Safety & Environment

- Guidance on Health and Safety is available on the appropriate Material Safety Data Sheet, which can be obtained from <http://www.epc.shell.com/>

- Protect the Environment**


Take used oil to an authorised collection point. Do not discharge into drains, soil or water.

Additional Information

- Advice**

Advice on applications not covered here may be obtained from your Shell representative.

Viscosity - Temperature Diagram for Shell Morlina S1 B

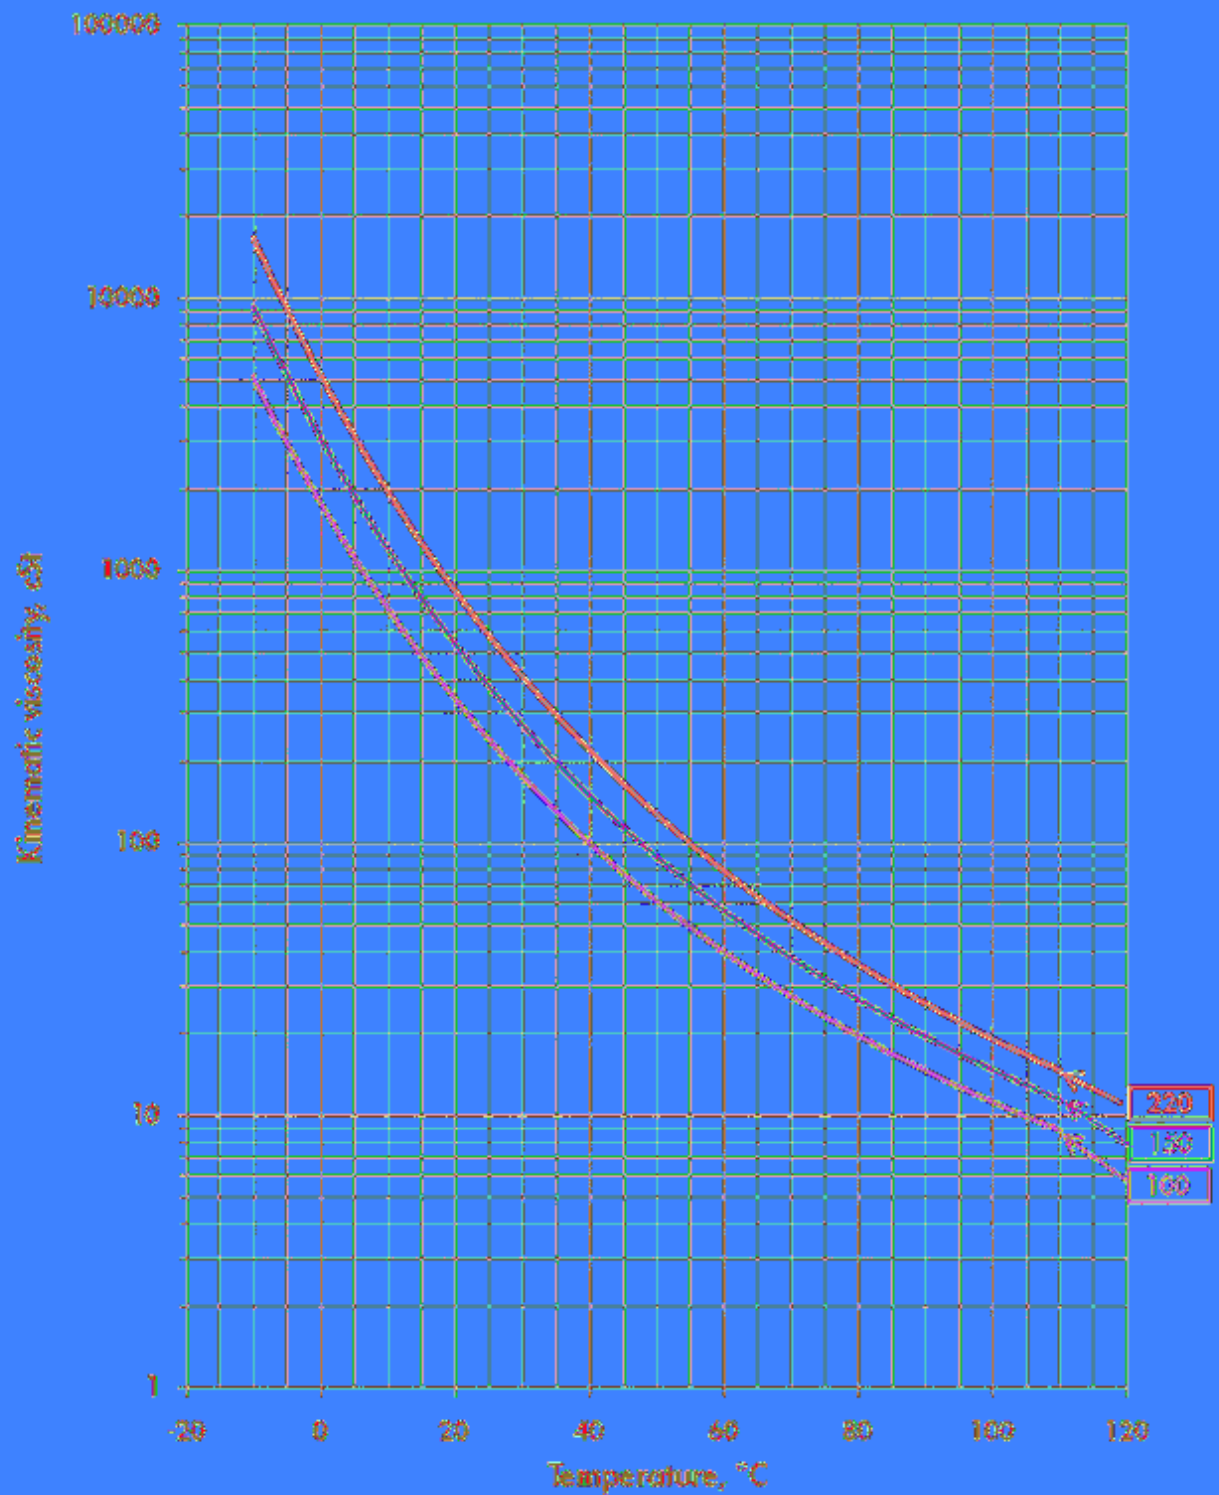

Viscosity - Temperature Diagram for Shell Morlina S1 B

